

Improved storage of coherent and squeezed states in imperfect ring cavity

Petr Marek and Radim Filip
Department of Optics, Palacký University,
17. listopadu 50, 772 07 Olomouc,
Czech Republic

(Dated: February 9, 2008)

We propose a method of an improving quality of a ring cavity which is imperfect due to non-unit mirror reflectivity. The method is based on using squeezed states of light pulses illuminating the mirror and gradual homodyne detection of a radiation escaping from the cavity followed by single displacement and single squeezing operation performed on the released state. We discuss contribution of this method in process of storing unknown coherent and known squeezed state and generation of squeezing in the optical ring cavities.

PACS numbers: 03.65.Ud

I. INTRODUCTION

Recently, quantum information processing and quantum communication experiments utilizing photons as information carrier (for a review [1]) are performed without an utilizing advantage of quantum memories. The quantum memories can store a quantum state carrying information for a further processing as well as they can store an entanglement resource for an actual time quantum communication. However, the photons are relatively difficult to store and an implementation of a practical quantum memory for photons remains a challenging problem. Earlier proposals for a quantum memory were mainly dedicated to a storing quantum states of individual photons in a high-Q cavity [2], in collective atomic excitations [3] or in a fiber loop [4]. To enhance storing individual photon in the fiber loop, a linear-optical quantum computing circuit that runs an error-correction code [6] was proposed [5]. To protect a qubit against decoherence, the schemes based on the decoherence-free subspace [7] were also proposed and implemented for trapped ions [8].

Quantum information processing with continuous variables (CVs) based on a manipulation with Gaussian states of many-photon systems [9] represents an interesting alternative to the quantum information and communication protocols exploiting individual photons. In the CV quantum information protocols, the coherent states are mainly utilized as the information carrier and the squeezed states are basic resource for a production of the CV entangled states. To perform more complex and collective CV quantum information protocols we would like to implement a quantum memory which is able to store unknown coherent state or known squeezed state for a long time. To store a continuous-variable information encoded as simultaneous amplitude and phase modulation of coherent state for a long time we can utilize a simple quantum memory device based on optical-fiber loop or a ring cavity. We lock the continuous-wave field into the high-fidelity fiber loop or ring cavity and release it when we need. Recently, a similar method has been proposed to store the polarization qubit in a long length fiber [4]. However, in the ring cavity an unavoidable

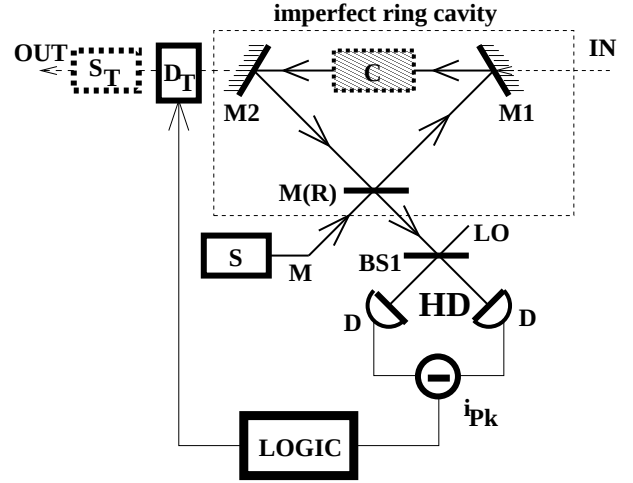


FIG. 1: Setup for protection of the coherent, squeezed states and squeezed state generation: C – nonlinear crystal, $M1, M2$ – high-quality mirrors, $M(R)$ – imperfect mirror with the reflectivity R , S – source of the squeezed states, LO – local oscillator, $BS1$ – 50:50 beam splitter, HD – homodyne measurement, D – detectors, D_T – displacement operation, S_T – squeezing operation.

losses at mirrors deteriorate information encoded in the coherent state and typically restricts the storage time. Further, to produce a pronouncedly squeezed state for efficient CV quantum information processing, a ring cavity containing a nonlinear crystal is frequently used in a continuous-wave optical parametric oscillator/amplifier (OPO/OPA) [10]. Here an unavoidable losses of the imperfect mirrors restricts a maximal value of the produced squeezing. A method of the squeezing generation in the ring cavity was used, for example, to produce entangled state for a teleportation of coherent states [11].

In this paper we propose a method how to increase the quality of the ring cavity if we are able to inject an auxiliary squeezed light to the cavity through the imperfect mirror and detect a field leaving outside from the mirror by a homodyne detection in every cycle of the field in the ring cavity. According to the measured data, a

simply joint feed-forward correction by a modulation of the final state can be performed after many cycles in the ring cavity and we can preserve an unknown coherent or known squeezed state for a long time as will be shown in Sec. II. For the storing of the coherent state it is even necessary only to perform an additional squeezing operation to obtain a fidelity of the storing which is independent on unknown input amplitude. The presented method is based on CV quantum erasing procedure [12] which allows us to restore at least partially the input state after an interaction. Thus a reflectivity of the mirror is in fact enhanced using the erasing procedure. It can also be used to enhance maximal amount of the squeezing generated in OPO/OPA in which the ring cavity is filled by a nonlinear crystal as will be demonstrated in Sec. III. Thus we could consequently stimulate an increase of fidelity of CV quantum information protocols. This method is different to the error correcting codes since it works only with information which leaves from the memory unit.

II. PROTECTION OF CV STATE

In this Section, we demonstrate usefulness of quantum erasing to achieve an enhancement of a time of the storage of unknown coherent state or known squeezed state. We consider an empty imperfect ring cavity (without the crystal C) depicted in Fig. 1 which consists of two mirrors $M1, M2$ with almost unit reflectivity at a frequency of stored field. The third imperfect mirror $M(R)$ has a less reflectivity R than $M1, M2$ however still $R > 0.99$ as is typical in this kind of experiments. The rest of the losses and imperfections are assumed to be negligible in our analysis.

To demonstrate a protection by the erasing effect, the standard setup of imperfect cavity (in the box) is completed by the generator S of squeezed states, balanced homodyne detection HD , displacement correction D_T and squeezing correction S_T . The erasing procedure can be performed as follows. In every round-trip of the quantum field in cavity, a state squeezed in the quadrature variable X_M is mixed with a state of an internal cavity mode and the output state leaving from the mirror BS is detected by homodyne measurement producing the current i_P proportional to a measured quadrature of the field. During many cycles in the cavity, the currents $i_{P1}, i_{P2}, \dots, i_{PN}$ corresponding to every cycle are registered in a computer memory. After N cycles corresponding to storage time, a quantum state leaving the cavity by a reducing the reflectivity of the mirror $M2$ can be corrected by a total displacement D_T calculated from the measured values $i_{P1}, i_{P2}, \dots, i_{PN}$, known reflectivity R and total number N of the round trips. In addition, we can convert the corrected state to another having the same mean values as the input state by total squeezing operation S_T , depending on the reflectivity R and number N of the cycles.

Now, let us look at this procedure in detail. Using Heisenberg picture representing each mode of light by

a pair of the conjugate quadrature operators X and P satisfying the commutation relations $[X, P] = i$, the k -th pass through the cavity mirror $M(R)$ can be represented by transformation relations

$$\begin{aligned} X_k &= RX_{k-1} + TX_{Mk}, & P_k &= RP_{k-1} + TP_{Mk} \\ X'_{Mk} &= TX_{k-1} - RX_{Mk}, & P'_{Mk} &= TP_{k-1} - RP_{Mk}, \end{aligned} \quad (1)$$

where X_k, P_k denote the quadrature variables of the signal mode after k -th round and X_{Mk}, P_{Mk} stand for the quadrature variable of the meter mode used to inject a squeezed state into the mirror. Detecting a field from the mirror by the homodyne detection, the operator P'_{Mk} collapses on a real number i_{Pk} . Using relation (1) we can straightforwardly derive an evolution of the quadrature operators

$$\begin{aligned} X_N &= R^N X_{in} + T \sum_{k=1}^N R^{k-1} X_{Mk}, \\ P_N &= R^N P_{in} - T \sum_{k=1}^N R^{-k} i_{Pk} \end{aligned} \quad (2)$$

after N round trips in the cavity. Here X_{in} and P_{in} describe the initial quadrature operators of the signal mode which we are trying to protect. Now to suppress the decoherence effect in the signal mode after the series of the N passages through the mirror, we can use all measured values $i_{P1}, \dots, i_{PN}$ and implement on signal mode the total displacement operation

$$X'_N = X_N, \quad P'_N = P_N + T \sum_{k=1}^N R^{-k} i_{Pk}, \quad (3)$$

followed by additional squeezing operation

$$X_{out} = \frac{X'_N}{R^N}, \quad P_{out} = R^N P'_N \quad (4)$$

to achieve an universal character of the protection. Universality means that the mean values of both complementary variables are preserved. Thus the resulting universal transformation

$$X_{out} = X_{in} + \frac{T}{R^N} \sum_{k=1}^N R^{k-1} X_{Mk}, \quad P_{out} = P_{in} \quad (5)$$

of the quadrature operators is obtained. Through our activities any unknown input state was fully restored in the momentum. Further, the mean value of both the coordinate and momentum are unchanged if the injected states have vanishing mean values of the quadratures. However the variance of the quadrature X_{out} will differ from the variance X_{in} . If we consider the injected states to be independent and having the same variance σ_{XM} , we can write the variance of X_{out} in the following form

$$\sigma_{X_{out}}^2 = \sigma_{X_{in}}^2 + (R^{-2N} - 1)\sigma_{XM}^2. \quad (6)$$

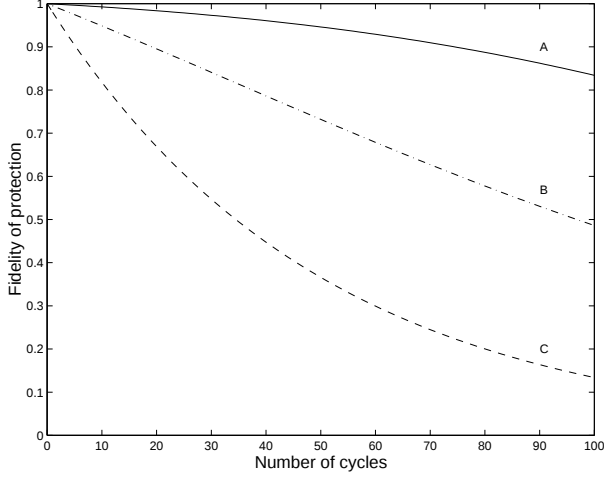


FIG. 2: Fidelity of a coherent state in the protected ring cavity: $R = 0.99$, variance of squeezed quadrature of the meter modes $\sigma_M^2 = 0.5 \exp(-2)$.

From this follows that we can reduce the noise in the quadrature X_{out} as well if we use a state squeezed in the coordinates X_{Mk} and thus achieve almost perfect protection of an unknown coherent or known squeezed state. The reason is that the mixing the signal with appropriately squeezed states on the mirror $M(R)$ approaches the ideal quantum non-demolition measurement of the certain field quadrature, which can be reversed perfectly by the erasing procedure [12]. Note that an amount of fluctuations in the complementary variables P_{Mk} does not influence the proposed protection procedure and only the squeezing of single quadrature is relevant.

For a comparison, without any measurements performed, the resulting variances would look as

$$\begin{aligned}\sigma_{X_{out}}^2 &= R^{2N} \sigma_{X_{in}}^2 + (1 - R^{2N}) \sigma_{X_M}^2, \\ \sigma_{P_{out}}^2 &= R^{2N} \sigma_{P_{in}}^2 + (1 - R^{2N}) \sigma_{P_M}^2,\end{aligned}\quad (7)$$

if the protected state has mean values equal to zero. However, if this was not true, we would have to perform phase-insensitive amplification to achieve universality and the variances would be

$$\begin{aligned}\sigma_{X_{out}}^2 &= \sigma_{X_{in}}^2 + (R^{-2N} - 1) \sigma_{X_M}^2 + (R^{-2N} - 1) \sigma_{X_z}^2, \\ \sigma_{P_{out}}^2 &= \sigma_{P_{in}}^2 + (R^{-2N} - 1) \sigma_{P_M}^2 + (R^{-2N} - 1) \sigma_{P_z}^2,\end{aligned}\quad (8)$$

with X_z, P_z being the operators of ancillary mode of the amplifier. Qualitatively, the protection method reduces noise completely in the quadrature P_{out} and also partially in the quadrature X_{out} as can be seen from Eq. (7,8)

To demonstrate an usefulness of the protection quantitatively we fix the reflexivity R of the mirror $M(R)$ and the squeezing in the auxiliary modes Mk since we will compare different strategies with the same resources. In CV quantum computing there are important two basic types of quantum states, coherent and squeezed vacuum state, and our aim was to show how the protection we

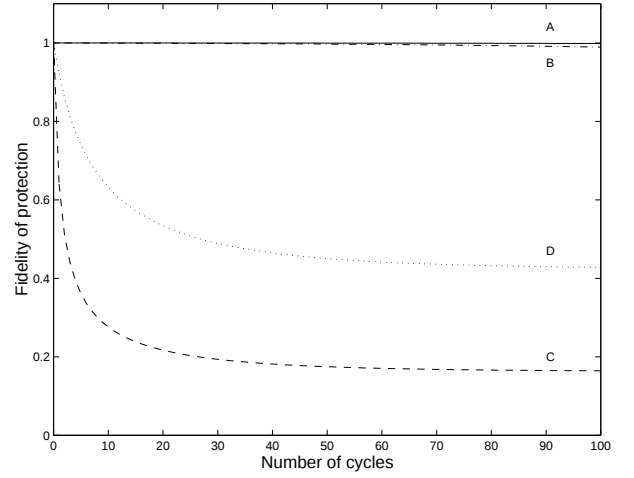


FIG. 3: Fidelity of a squeezed vacuum state in the protected ring cavity: $R = 0.99$, the variance of squeezed quadrature of the meter modes $\sigma_M^2 = 0.5 \exp(-2)$, signal mode squeezed in the quadrature P with the variance $\sigma_{P_{in}}^2 = 0.5 \exp(-5)$.

proposed increases efficiency of storage of these states. We consider and compare four different strategies: (A) protection with vacuum squeezed in Xk injected into the modes Mk and homodyne detections, (B) protection with unsqueezed vacuum injected in the modes Mk and homodyne detections, (C) unprotected storing and (D) only injecting vacuum squeezed in Pk in into the modes Mk without the homodyne detections.

To compare the different strategies we use the fidelity of protection

$$F = [(\sigma_{X_{in}}^2 + \sigma_{X_{out}}^2)(\sigma_{P_{in}}^2 + \sigma_{P_{out}}^2)]^{-1/2}, \quad (9)$$

which is the overlap between initial and resulting Gaussian state. Due to universality of storage only the variances of the initial and resulting state must to be calculate to infer the fidelity. For unknown initial coherent state, the fidelity of protection strongly depends on squeezing of meter mode. In Fig. II we use for illustration a feasible squeezed state generated with the variance $\sigma_M^2 = 0.5 \exp(-2)$ corresponding to 3dB squeezing injected to the imperfect mirror with $R = 0.99$. It is evident that using erasing with the squeezed state is the best strategy for a long time preservation of unknown coherent state. We can see a qualitative change from an exponential decoherence in the case C to the non-exponential one in the case A. The strategy of squeezed vacuum injection (D) is counterproductive since any unbalancing noise in the complementary quadratures at output results in formidable decrease of fidelity.

On the other hand, squeezed states are asymmetrical in the variances so that we can greatly benefit from asymmetry of our method, if we know the orientation of the squeezed state which could be protected. In our method, a noise in a quadrature is suppressed at the cost of blurring the other one. Since our correction completely

preserves the squeezed quadrature and the noise added into the conjugate one is diminutive compared to noise already present, the fidelity is almost unity. Also the squeezing of the mode Mk is not of great importance for almost perfect reflectivity R , as can be seen in Fig. (II). A larger distinction between the strategies (A) and (B) arises for a large number N of the rounds in the cavity. Both other strategies (C,D) are worse than (A,B). Here the fidelity strongly depends on the proportion of variances of squeezed quadratures of the signal and meter modes. If we consider the input state is squeezed substantially more than the meter modes, what is reasonable demand, we never find the fidelity for strategy (D) comparable with the protected one. It turned out that for both unknown coherent and known squeezed state protection is always the best strategy.

III. PROTECTION OF SQUEEZING GENERATION

Because of a strong squeezing producing a large entanglement is required for the CV quantum information protocols, the optical cavity often used to form OPO/OPA so that the down-converted fields pass the nonlinear medium numerous times. For the single pass case, the interaction in continuous-wave regime is weak and requested gain is obtained after sufficient number of rounds in the cavity, thus equivalently lengthening the interaction distance. As an example we assume ring cavity filled by a nonlinear crystal exhibiting (degenerate or non-degenerate) down-conversion process. It consists of two mirrors $M1, M2$ with almost unit reflectivity at a frequency of down-converted beams and almost unit transitivity for the pump beam. This setup operating as a continuous-wave frequency degenerate but polarization non-degenerate subthreshold OPO with collinear phase-matched type-II down-conversion in KTP was frequently used in the many experiments [10]. It produces a squeezed state in two linear polarization modes which can be simply converted to single mode squeezing by $\lambda/2$ -wave plate along a direction $\pi/4$ relative to these polarizations. The nonlinear crystal is pumped by a pulse from the ring laser with intra-cavity frequency doubling. For simplicity, a pumping part of the experimental setup was omitted in Fig. 1.

Next we consider that a nonlinear crystal C producing squeezed light pumped by an intensive laser pulse is inserted into the cavity to obtain a source of a sufficiently squeezed state. Here the imperfection of the cavity mirror decreases the efficiency of the squeezing generation, possibly hindering the cumulation of effect at all. We can use the previous method of protection to effectively reduce a losses in mirror $M(R)$ and thus enhance an efficiency of the squeezing generation.

To protect the operation we apply a slight modification of above described procedure. The ring cavity containing nonlinear medium performing a weak squeezing of the

signal field during each trip in the cavity can be described by the following transformation relations

$$\begin{aligned} X_k &= RGX_{k-1} + TX_{Mk}, & P_k &= \frac{R}{G}P_{k-1} + TP_{Mk} \\ X'_{Mk} &= GTX_{k-1} - RX_{Mk}, & P'_{Mk} &= \frac{T}{G}P_{k-1} - RP_{Mk} \end{aligned} \quad (10)$$

for the quadrature operators after the k -th cycle. Here G is a gain of squeezing per single cycle in the cavity which is typically small. In an analogy with the previous case, after the displacement operation

$$X'_N = X_N, \quad P'_N = P_N + \frac{T}{R} \sum_{k=1}^N (RG)^{1-k} i_{Pk}, \quad (11)$$

we find the resulting state have the variances

$$\begin{aligned} \sigma_{Xout}^2 &= \frac{1}{2}(RG)^{2N} + T^2 \frac{1 - (RG)^{2N}}{1 - (RG)^2} \sigma_{XM}^2, \\ \sigma_{Pout}^2 &= \frac{1}{2}(RG)^{-2N}. \end{aligned} \quad (12)$$

if we consider unsqueezed vacuum to be the initial state. Note, in contrast to protection of the state, we have not performed any additional squeezing S_T of the signal mode after it leaved the cavity.

Again we will compare few different strategies, so for evaluation is needed to find the variances of signal field quadrature operators

$$\sigma_{Xout}^2 = \frac{1}{2}(RG)^{2N} + T^2 \frac{1 - (RG)^{2N}}{1 - (RG)^2} \sigma_{XM}^2, \quad (13)$$

$$\sigma_{Pout}^2 = \frac{1}{2}\left(\frac{R}{G}\right)^2 + T^2 \frac{1 - \left(\frac{R}{G}\right)^2}{1 - \left(\frac{R}{G}\right)^2} \sigma_{PM}^2 \quad (14)$$

if no active protection was performed. Recall now, we are trying to protect the squeezing operation. That is, if our initial state was vacuum then our target state should be a minimal uncertainty squeezed state. There are two criteria of a quality that we have taken into our account. First one is overall fidelity between the target and actually produced state, the second one is an amount of achievable single quadrature squeezing. Again, four different strategies (A,B,C,D) were considered as in the previous Section.

Consider a pure squeezed state as a target state and ask how is it close to our prepared state. To quantify it we can count the fidelity

$$F = [(\sigma_{Xout} + \sigma_{Xtarget})(\sigma_{Pout} + \sigma_{Ptarget})]^{-1/2}. \quad (15)$$

between target and obtained state and compare it using the strategies (A,B,C,D). The result is depicted in Fig. III. For a small number of cycles the strategy of squeezed vacuum injection (D) looks better but only because meter mode squeezing is still comparable or even better than the squeezing of signal field, so interaction on the mirror actually improves the state in the cavity. However, at some point the relevant quadrature cannot

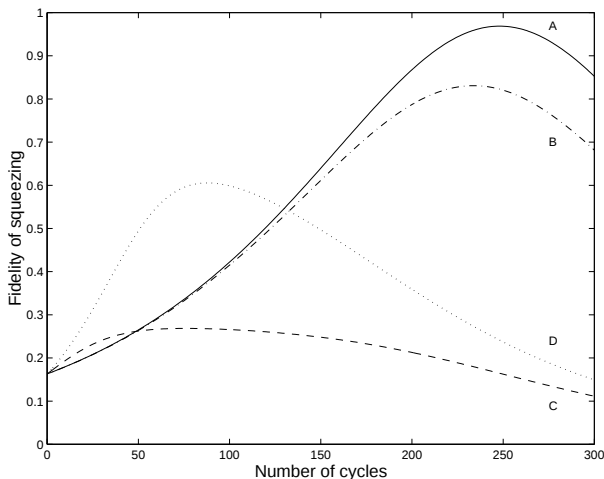


FIG. 4: Fidelity of squeezed state produced in the protected ring cavity: $R = 0.99$, the gain of squeezing in a single cycle $G = \exp(0.02)$, the variance of the squeezed quadrature of meter modes $\sigma_M^2 = 0.5 \exp(-2)$. A target mode is squeezed in quadrature P with variance $\sigma_{Ptarget}^2 = 0.5 \exp(-5)$.

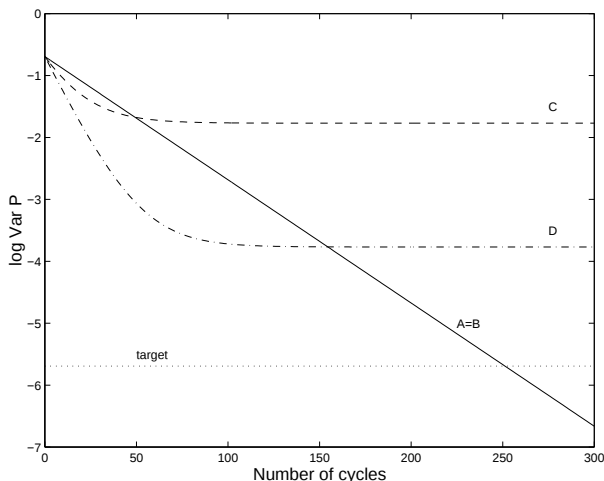


FIG. 5: Logarithm of squeezed variance of state produced in the protected ring cavity: $R = 0.99$, the gain of squeezing in a single cycle $G = \exp(0.02)$, the variance of squeezed quadrature of meter modes $\sigma_M^2 = 0.5 \exp(-2)$, A target mode is squeezed in quadrature P with variance $\sigma_{Ptarget}^2 = 0.5 \exp(-5)$.

be squeezed further due to the cavity losses and each cycle in cavity only adds additional noise to the conjugate quadrature what results in a fidelity decrease. If we apply the correction procedure the squeezing buildup is slower, but inevitable. We can represent squeezing protected by our method as nearly ideal (squeezed quadrature ideal, antisqueezed quadrature slightly disturbed), but with the

gain RG . From this interpretation is apparent we need reflexivity and gain choose so that $RG > 1$ to obtain high fidelity results.

Next we can study how the evolution of noise in the quadrature which we are trying to squeeze depend on the number N of cycles. The results can be understand from Fig. III. The logarithmic scale was chosen to clearly show what is happening. First, for protected case (A,B), the variance of momentum is not dependent on squeezing in modes Mk and it has obviously no theoretical lower bound. Here also is not necessary to use a squeezed meter modes for a generation of the squeezing in a single quadrature with no respect to the noise in the complementary one. On the other hand, for the strategies (C,D) when the protection is not performed the squeezed variances saturate at a point

$$\lim_{N \rightarrow \infty} \sigma_{Pout} = G^2 \frac{1 - R^2}{G^2 - R^2} \sigma_{PM} \quad (16)$$

determined by the proprieties of the cavity and the used squeezing in the modes Pk . In Fig. III we use in the case (D) the same amount of squeezing $\sigma_M P = 0.5 \exp(-2)$ as in the cases (A,B) however in the complementary quadrature.

From this follows, if we are interested only in achieving squeezing in one quadrature, what is often sufficient in the CV quantum information protocols, such as optimal CV teleportation, or protection of state depicted in previous section, it is not necessary use a squeezing in the modes Mk to protect the squeezing. We need only perform an effective homodyne measurement followed by a single displacement operation at the end.

IV. CONCLUSION

We have shown how collective quantum erasure performed on single mode in different times can be used to increase the quality of the cavity and the efficiency of storing and squeezing generation processes within. Our method formidably increases the fidelity of storing of unknown coherent state, but due to its asymmetrical nature allows almost perfect storage of known squeezed state. If our protocol is applied to process of squeezing generation it removes the lower bound for one quadrature squeezing attainable and also allows production of pure squeezed states with high fidelity.

Acknowledgments

The work was supported by project 202/03/D239 of The Grant Agency of the Czech Republic, by the projects LN00A015 and CEZ: J14/98 of the Ministry of Education of Czech Republic.

[1] The Physics of Quantum Information, D. Bouwmeester, A. Ekert and A. Zeilinger (eds.), Springer-Verlag (2000).

[2] X. Maitre, E. Hagley et al., Phys. Rev. Lett. **79**, 769

- (1997).
- [3] D. F. Phillips et al., Phys. Rev. Lett. **86**, 783-786 (2001); J. M. Taylor et al., Phys. Rev. Lett. **90**, 206803 (2003); C. Schori et al., Phys. Rev. Lett. **89**, 057903 (2002). Ch. van der Wal, Science **301**, 196 (2003)
 - [4] T.B. Pittman and J.D. Franson, Phys. Rev. A **66**, 062302 (2002);
 - [5] R.M. Gingrich, quant-ph/0306098.
 - [6] P.W. Shor, Phys. Rev. A **52**, 2493 (1995); D. Gottesman, Phys. Rev. A **54**, 1862 (1996); A. Ekert and C. Macchiavello, Phys. Rev. Lett. **77**, 2585 (1996); A.R. Calderband *et al.*, Phys. Rev. Lett. **78**, 405 (1997).
 - [7] P. Zanardi, and M. Rasetti, Phys. Rev. Lett. **79**, 3306 (1997); D.A. Lidar, I.L. Chuang, and K.B. Whaley, Phys. Rev. Lett. **81**, 2594 (1998); L.M. Duan, and G.C. Guo, Phys. Rev. A **57**, 737 (1998);
 - [8] D. Kielpinski, et al., Science **291**, 1013 (2001);
 - [9] S.L. Braunstein, Phys. Rev. Lett. **98**, 869 (1998); S.L. Braunstein and H.J. Kimble, S. Lloyd and S.L. Braunstein, Phys. Rev. Lett. **82**, 1784 (1999); Phys. Rev. A **61**, 042302 (2000); S.F. Pereira et al., Phys. Rev. A **62**, 042311 (2000); Ch. Silberhorn, et al., Phys. Rev. Lett. **86**, 4267 (2001); S.L. Braunstein et al., Phys. Rev. Lett. **86**, 4938 (2001); J. Fiurášek, Phys. Rev. Lett. **86**, 4942 (2001); X. Li et al., Phys. Rev. Lett. **88**, 047904 (2002); W.P. Bowen et al., Phys. Rev. Lett. **88**, 093601 (2002); Ch. Silberhorn et al., Phys. Rev. Lett. **88**, 167902 (2002); Ch. Silberhorn et al., Phys. Rev. Lett. **89**, 167901 (2002); F. Grosshans and P. Grangier and Phys. Rev. Lett. **88**, 057902 (2002) W. P. Bowen et al., Phys. Rev. A **67**, 032302 (2003); W.P. Bowen et al., Phys. Rev. Lett. **90**, 043601 (2003); A. Dolinska et al., Phys. Rev. A **68**, 052308 (2003); F. Grosshans et al., Nature (London) **421**, 238 (2003);
 - [10] L.-A. Wu et al., Phys. Rev. Lett. **57**, 691 (1986); S.F. Pereira et al., Phys. Rev. A **38**, 4931 (1988); Z.Y. Ou, et al., Appl. Phys. B **55**, 265 (1992); Z.Y. Ou et al., Phys. Rev. Lett. **68**, 3663 (1992); Z.Y. Ou et al., Phys. Rev. Lett. **70**, 3239 (1992); S.F. Pereira, et al., Phys. Rev. Lett. **72**, 214 (1994); P.K. Lam, et al., J. Opt. B: Quantum Semiclass. Opt. **1**, 469 (1999); B. Buchler, et al., Phys. Rev. A **65**, 011803(R) (2001); Y.J. Lu and Z.Y. Ou, Phys. Rev. A **62**, 033804 (2000);
 - [11] A. Furusawa, et al., Science **282**, 706 (1998); T.C. Zhang et al., quant-ph 0207076.
 - [12] R. Filip, Phys. Rev. A **67** 042111 (2003).
 - [13] P.K. Lam et al., J. Opt. B: Quantum Semiclass. Opt. **1**, 469 (1999); B. Buchler, et al., Phys. Rev. A **65**, 011803 (2001); U.L. Andersen, et al., J. Opt. B: Quantum Semiclass. Opt. **4**, S229 (2002).